



MODWALL INSTRUCTIONS

For a safe and effective installation, mount panels to walls with 16" on center studs. **FAILURE TO HIT STUDS COULD RESULT IN BODILY HARM AND/OR EQUIPMENT DAMAGE!**

Have questions? Contact us via provided support email below or visit our website for installation video tutorials. Of course, don't forget to like and follow Tactical Walls and share your setup with us and the world!

Share your setup with us and the world!



support@tacticalwalls.com
TACTICALWALLS.COM

GOT TOOLS?

Studfinder, tape measure, level, drill/driver, and a second pair of hands.

PANEL INSTALL


After locating desired location on wall, use a level and a second pair of hands to hold panel in place. Drive provided drywall screws through panel into wall studs.

We recommend using at least 12 screws to keep panel from pulling away from wall. Use additional if panel is bowing from weight.

When installing a series of panels vertically, install the lowest one first and simply stack the others on top, lining them up with each other.

CUSTOM FIT

All ModWall panels are made from HDPE plastic, making it simple to cut to size & shape with most bladed saws.

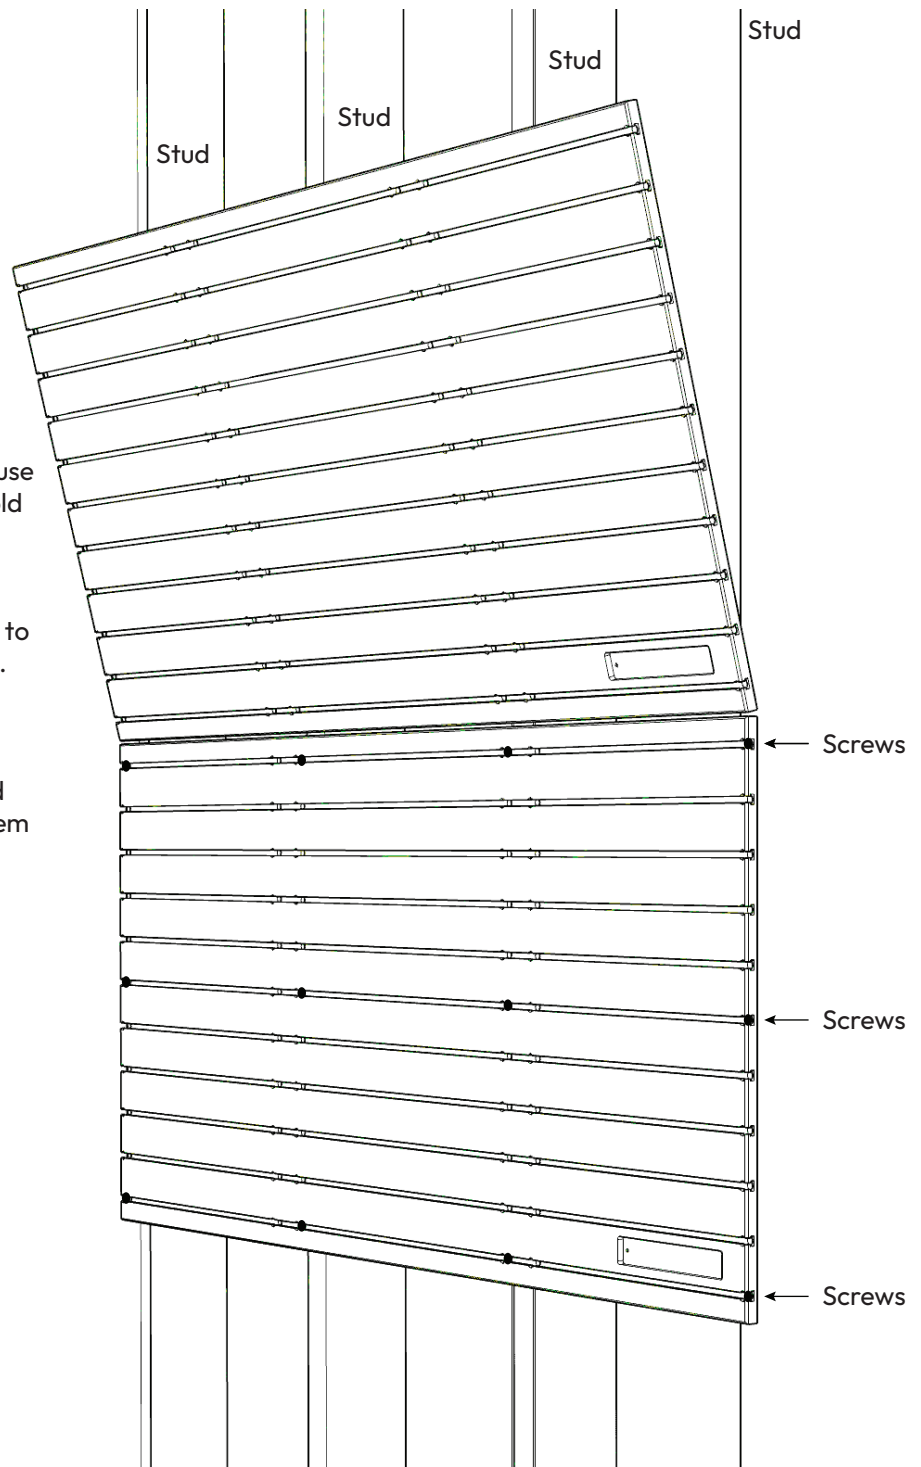



MODWALL ACCESSORY INSTALLATION

HEX SCREWS

A - Small 1/8


B - Large 5/32

All accessories are adjustable to desired application by simply tightening or loosening the slot bolts with the provided hex key.

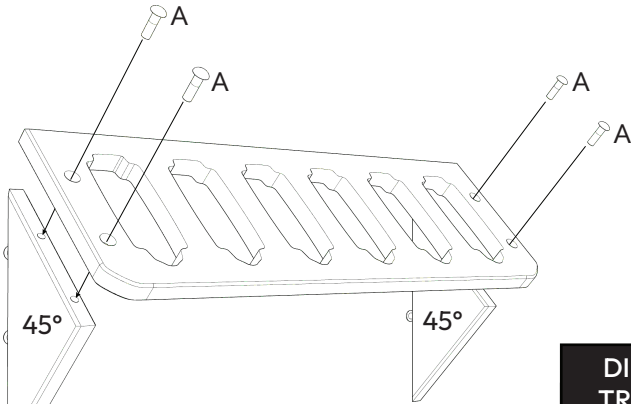
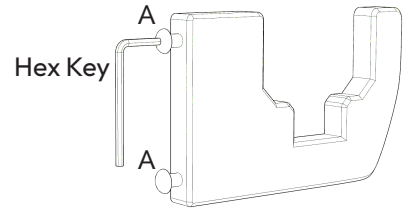


MULTI-PISTOL RACKS equipped with 45-degree pre-drilled triangles and are assembled as depicted. Long side of triangle always attaches unto the wall.

DIFFERENT TRIANGLES!





FLAT-TOP SHELVES come with pre-drilled 90-degree triangles which are easily assembled with provided screws.

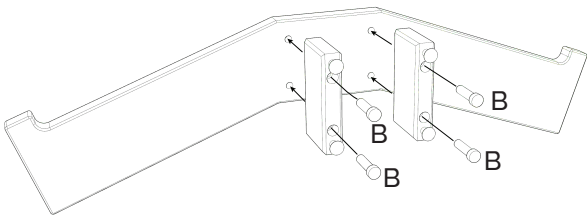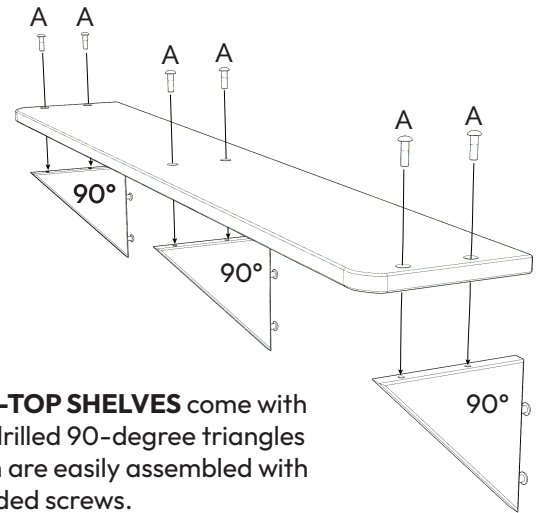


VEST HANGERS and other products that use mounting blocks are set 2 inches apart vertically. Use the provided counter-screws to assemble.

Assemble the **LARGE SHELVES** as depicted with the buttonhead screws provided.

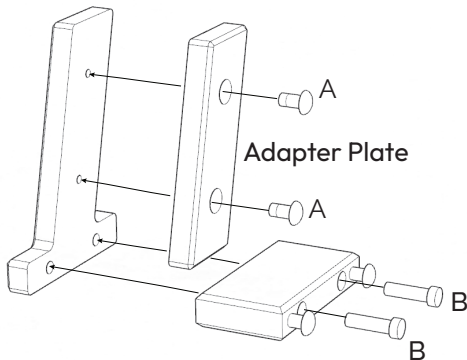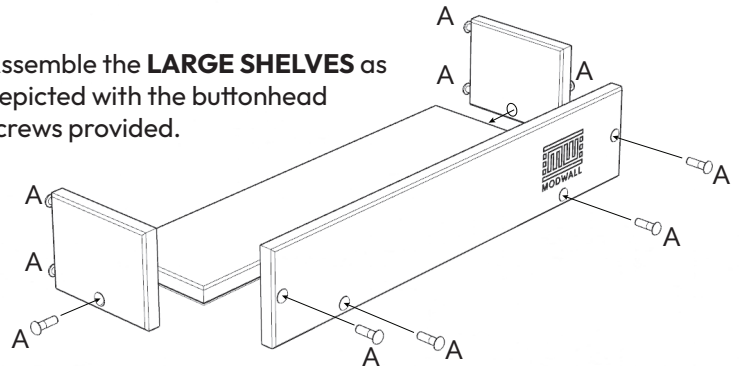

LEFT & RIGHT-FACING PISTOL HANGERS are adaptable to single & double-stack mag wells. For single-stack applications, unfasten the adapter plate screws with provided hex key.

RIFLE HANGERS are assembled with four counter-sink screws thru the mounting blocks. The top block must be the one with screws for the panel slots.



For **NANO SOLUTIONS**, flip the top mounting block 90 degrees and fasten it to the vertical holes that line up with the screws. Do not use the lower block.

